

SI964PM



| | |
|----------------|---------------|
| Product Family | Hob |
| Built-in | Traditional |
| Dimensions | 60 cm |
| Power supply | Electric |
| Type | Induction |
| EAN code | 8017709275822 |



Aesthetics



| | |
|-------------------------------|-------------------------------|
| Colour | Cream |
| Aesthetics | Victoria |
| Material | Heat-moulded |
| Glass Type | Eclipse ceramic |
| Frame | Yes |
| Frame colour | Cream |
| Type of control setting | Control knobs |
| Slider | Red |
| Control knobs position | Front |
| No. of controls | 4 |
| Controls colour | Chrome |
| Serigraphy colour | Grey |
| Alternative colours available | White, Black, Stainless steel |

Programme / Functions




| | |
|-----------------------------------|---|
| Total no. of cook zones | 4 |
| No. of induction cook zones | 4 |
| No. of cooking zones with booster | 4 |
| Power levels | 9 |

Options



| | | | |
|--|--------------------------------|------------------------------------|-----|
| Standard cut out | 478-482x555-560 mm | Control Lock / Child Safety | Yes |
| Limited Power Consumption Mode | Yes | Quick start | Yes |
| Limited Power Consumption Mode in W | 1900, 2600, 3000, 3800, 4500 W | | |

Technical Features




Front left - Induction - single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm
 Rear left - Induction - single - 1.30 kW - Booster 1.40 kW - Ø 16.0 cm
 Rear right - Induction - single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm
 Front right - Induction - single - 1.30 kW - Booster 1.40 kW - Ø 16.0 cm

| | | | |
|---|-----|---|-----|
| Automatic setting according to pan dimension | Yes | Automatic switch off when overheat | Yes |
| Automatic pan detection | Yes | Residual heat indicator | Yes |
| Minimum pan diameter indication | Yes | Protection against accidental start up | Yes |

Electrical Connection

| | | | |
|--------------------------|-----------|-------------------------------|-------------------------|
| Nominal power (W) | 7400 W | Type of electric cable | Single and Double phase |
| Current | 33 A | Frequency (Hz) | 50/60 Hz |
| Voltage (V) | 220-240 V | Terminal Box | 6 poles |
| Voltage 2 (V) | 380-415 V | | |

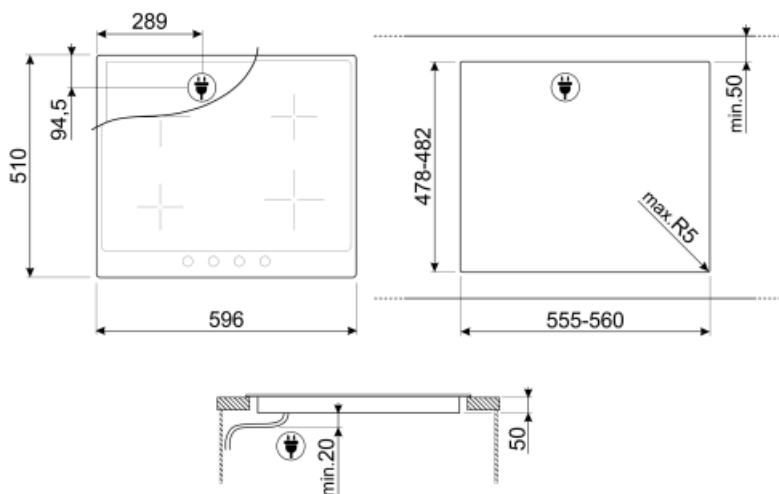












Not included accessories



SCRP

Induction and ceramic hobs and teppanyaki scraper

Symbols glossary

| | |
|---|---|
|  <p>Power booster: option allows the zone to work at full power when very intense cooking is necessary.</p> |  <p>Standard installation: Traditional installation in tabletop, suitable for any kitchen sets</p> |
|  <p>Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.</p> |  <p>CUT_OUT_STANDARD_72dpi</p> |
|  <p>ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.</p> |  <p>Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.</p> |
|  <p>Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.</p> |  <p>Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.</p> |
|  <p>Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.</p> |  <p>Darkness becomes light</p> |
|  <p>Knobs control</p> | |